

VECTOR G2 SBR

KRISS®


The KRISS Vector is the ideal choice for shooters seeking a controllable, compact weapon system. Available in popular calibers such as 9mm, .40 S&W, .45 ACP, and 10mm, the KRISS Vector is compatible with full size Glock® magazines, which allows shooters to share ammunition between their handgun and KRISS Vector. The KRISS Vector fieldstrips without the use of tools by simply removing 4 takedown pins to separate the major components for maintenance.

A wide range of accessories are also available to give users the ability reconfigure their KRISS Vector to suit their individual needs whether for home defense, competition, or duty use.



INCLUDES:

- > Low profile folding sights
- > Ambidextrous safety
- > Ambidextrous folding / telescoping stock
- > Glock® magazine compatibility
- > M-LOK modular handguard

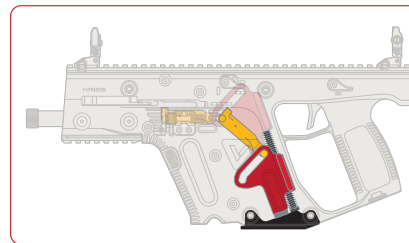

KRISS SUPER V RECOIL MITIGATION SYSTEM

At the heart of every KRISS Vector centerfire platform is the KRISS Super V System. The nonlinear operation is unlike any other, providing a shooter enhanced control through reduced felt recoil and muzzle climb. The low bore axis also provides control by aligning the bore directly in front of a shooter's hand. Combining both the KRISS Super V System and a low bore axis, the KRISS Vector allows for faster recovery between shots and increased speeds when transitioning between targets

COLOR OPTIONS:



ALPINE



FLAT DARK EARTH

| Model | Caliber | Magazine Capacity | Frame Material | Barrel Length | Overall Length (Folded / Unfold Extended) | Height | Width | Weight (Unloaded) |
|---------------|------------|-------------------|------------------------------------|--|---|-------------------|------------------|-------------------|
| Vector SBR 9 | 9x19, 9x21 | 10 / 17 / 40 | Advanced metal + polymer composite | 6.5 in / 165.1 mm 1/2" x 28 Thread | 18.5in / 472 mm 27.9 in / 709 mm | 6.8 in / 172.7 mm | 2.8 in / 71.1 mm | 7.3 lbs / 3.3 kg |
| Vector SBR 45 | .45ACP | 10 / 13 / 30 | Advanced metal + polymer composite | 6.5 in / 165.1 mm 16 x 1 LH Thread | 18.5in / 472 mm 27.9 in / 709 mm | 6.8 in / 172.7 mm | 2.8 in / 71.1 mm | 7.3 lbs / 3.3 kg |
| Vector SBR 10 | 10MM | 10 / 15 / 33 | Advanced metal + polymer composite | 6.5 in / 165.1 mm 9/16" x 24 Thread | 18.5in / 472 mm 27.9 in / 709 mm | 6.8 in / 172.7 mm | 2.8 in / 71.1 mm | 7.3 lbs / 3.3 kg |